


## RONDO-C

## Ring light

- >> C-Mount thread connection
- >> high light intensity
- >> for short working distances with small field of view
- >> compact housing
- >> for continuous, switched and pulsed operation  
(depending on type)



RONDO-C red



RONDO-C

### Technical specifications



Housing	Aluminium, black or natural anodised
Filterthread-connection	C-Mount
Total weight	approx. 55g
Operating / ambient temperature	max. 50°C recommended
IP protection class	depending on the version
Connector	M8 plug (4-pin) on pigtail 10cm*
Supply voltage**	<b>24VDC type or 12VDC type:</b> 24VDC resp. 12VDC <b>SC type:</b> For use in conjunction with a controller
Number of LEDs	16
LED lifetime	The LED lifetime of our lights is very high, but depends on many different factors such as ambient temperature, current load, and so on. Further information is available in the <b>Technical information LED lifetime</b> .

\* Cable not included in the scope of supply

\*\* more information see section Operating modes

### Characteristics

Colour *	LED characteristics		typical characteristics per light		
	Wavelength (approx.)	Viewing angle	Current demand (24V type) ** / constant current max. (SC type) [mA]	Pulse current max. (SC type) *** [A]	Intensity **** [W/m <sup>2</sup> ]
red	625nm	15°	30		330
white		15°	50		330
IR	850nm	6°			
IR	850nm	16°			

\* other colours and types from UV to infrared on request

\*\* stated current values of the 24V types should be considered approximate values

\*\*\* depending on the strobe conditions, recommended maximum values for a flash time of 1ms

\*\*\*\* approximately data measured in DC mode; Measuring distance 26mm



#### Safety note!

LED light systems can produce very intense radiation, which may possibly damage the eyes on improper use. Do not look directly into the light beam with unprotected eyes! Use eye protection!

### Operating modes

#### 24VDC type / 12VDC type

The lights are designed depending on the version for continuous operation at 24VDC or 12VDC.

The following operating modes are possible:

- DC operation at an appropriate power supply with 24VDC or 12VDC
- Switched operation with a matching power supply e.g. via PLC, opto-relay or controller (GS or SC series)
- Brightness-controlled operation via controller (GS or SC series) in conjunction with suitable power supply
- Pulsed mode via controller (GS or SC series) in conjunction with suitable power supply. The LED current can be increased in pulse mode up to a factor of 2 to 3.

#### SC type

For pulsed, switched or brightness-controlled operation, the lights are also available as optimized SC versions. They can be used in combination with our controllers of the GS and SC series and provide optimized and maximum current flow, especially in pulsed operation. We will assist you in selecting the right components.

#### Büchner Lichtsysteme GmbH


Uzstrasse 2  
86465 Welden  
Germany

Tel.: +49 (0)8293 | 909 112  
Fax: +49 (0)8293 | 909 111

E-mail: info@buechner-lichtsysteme.de  
Web: www.buechner-lichtsysteme.de


www.imaging-light-technology.com

### Dimensions

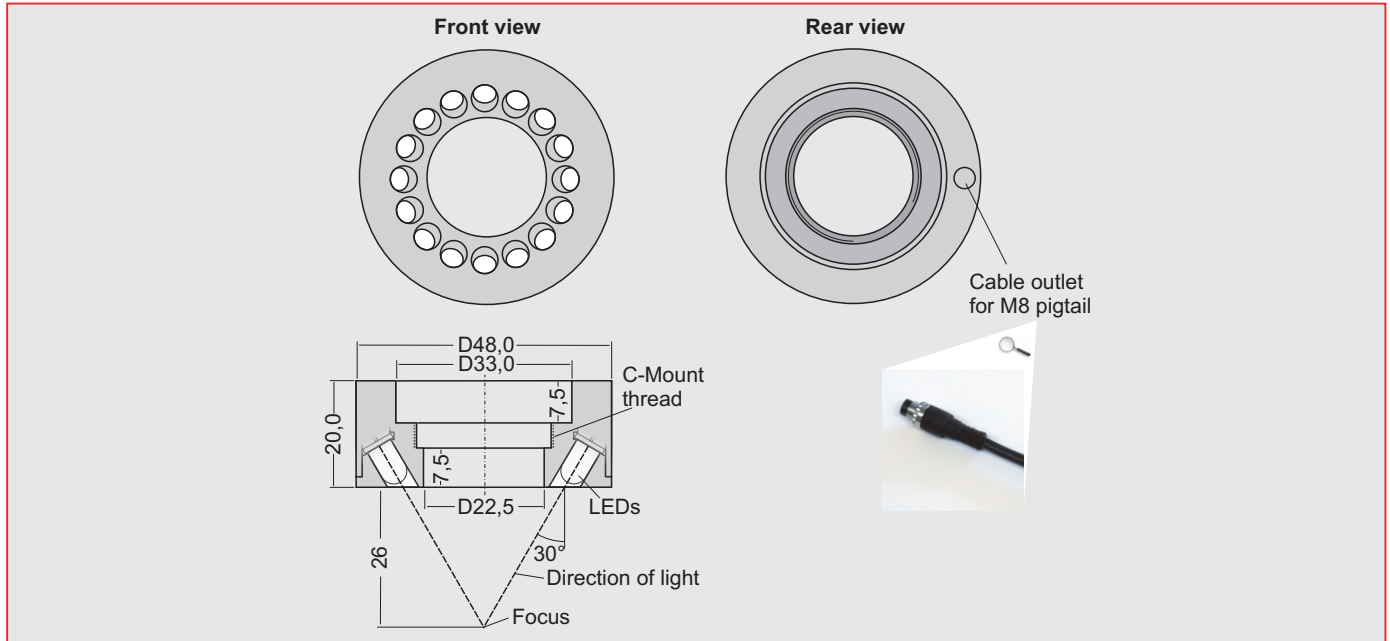

### PIN assignment connector

M8 plug 4-pin  
(Front view on pigtail)



24VDC type

PIN	Colour	Function
1	brown	+ 24V
3	blue	-


12VDC type

PIN	Colour	Function
2	white	+ 12V
3	blue	-

SC type

PIN	Colour	Function
4	black	+
3	blue	-

### Application notes

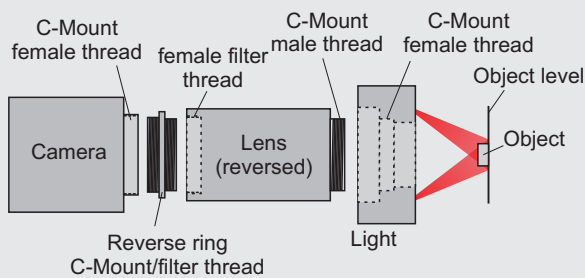

The RONDO-C is designed for small fields of view in macro applications and short working distances. It can be combined with e.g. standard lenses (25mm) in reverse position. By using a reverse ring the lens can be mounted reversed via the filter thread on the camera and the RONDO-C directly on the C-Mount thread of the lens.

### Accessories



**Reverse ring C-Mount to M27x0,5**  
for reverse mounting of lenses on cameras with C-Mount thread